

We are IntechOpen, the world's leading publisher of Open Access books Built by scientists, for scientists

5,300

Open access books available

129,000

International authors and editors

155M

Downloads

Our authors are among the

154

Countries delivered to

TOP 1%

most cited scientists

12.2%

Contributors from top 500 universities



WEB OF SCIENCE™

Selection of our books indexed in the Book Citation Index
in Web of Science™ Core Collection (BKCI)

Interested in publishing with us?
Contact book.department@intechopen.com

Numbers displayed above are based on latest data collected.
For more information visit www.intechopen.com



Multiscaling Analysis of Soil Drop Roughness

R. García Moreno¹, M.C. Díaz Álvarez²,
A. Saa Requejo² and J.L. Valencia Delfa³

¹*Departamento de la Navegación y de la Tierra, Facultad de Ciencias,
Universidad de La Coruña, A Coruña,*

²*CEIGRAM (Centre for Studies and Research on Agricultural and Environmental Risk
Management). School of Agricultural Engineering,
Polytechnic University of Madrid, Madrid,*

³*Escuela Universitaria de Estadística. Universidad Complutense de Madrid, Madrid
Spain*

1. Introduction

Soil surface roughness (SSR), which describes the microvariation in soil elevations across a field resulting primarily from tillage practices and soil texture, is one of the major factors in wind and water erosion (Porta Casanellas et al., 2003). Soil surface roughness and the complementary soil microrelief depression pattern determine water infiltration and drainage network development (Vidal Vázquez et al., 2006). Most studies on SSR have focused on the mathematical description of the variations appearing after rainfall to predict water infiltration and runoff (Linden and Van Doren, 1986; Kamphorst et al., 2000; Darboux and Huang, 2003).

Soil surface roughness is defined as the standard deviation of surface elevation readings. After tillage, soil microtopography exhibits randomly oriented tillage roughness marks of different sizes as well as clods (Allmaras et al., 1966; Zobeck and Onstad, 1987; Huang, 1998). Each specific tillage tool creates its own oriented roughness pattern, which is relatively easy to quantify using a simple geometric model. The challenge consists in quantifying the spatial distribution of randomly oriented SSR (Huang, 1998).

Soil surface roughness, taken on a scale ranging from centimeters to millimeters, plays a very important role in increasing water infiltration and the amount of crop water available and in reducing runoff on cultivated lands (Podmore and Huggins, 1981; Armstrong, 1986; Kamphorst et al., 2000). At the same time, it is an important factor in predicting wind erosion (Zobeck, 1991; Larney et al., 1995), one of the main forms of soil degradation in semiarid and arid climates. The concomitant loss of organic matter and nutrient-rich topsoil occasions a decline in soil productivity (Hagen, 1988; Potter et al., 1990; Larney et al., 1998). Soil surface roughness quantification is therefore crucial to understand soil erosive processes and how soil properties are altered by human action, primarily tillage (Perfect et al., 1990; Saxton, 1995; Murillo et al., 2004).

During the past few years, SSR analysis has focused on developing a unified conceptual framework for describing the geometric complexity of the data with the aid of fractal parameters. A number of methods have been proposed to estimate the fractal dimensions of soil microtopography (Linden and Van Doren, 1986; Malinverno, 1990; Perfect and Kay,

1995; Vidal Vázquez et al., 2005, 2006). The fractal techniques used can be divided into two groups: nonvariational and variational. Nonvariational techniques implicitly assume soil surface self-similarity across a range of scales and aim to characterize soil microrelief features by calculating a single index. Because microrelief fractal behavior is better modeled on the basis of either self-similar or prefractal surfaces, the use of nonvariational techniques has been highly criticized, which has in turn encouraged the use of variational methods (Vivas Miranda, 2000; Vidal Vázquez et al., 2005). The first group includes tortuosity (Bertuzzi et al., 1990) and the Richardson number (Gallart and Pardini, 1996; Pardini and Gallart, 1998). The second group of methods, in turn, is comprised of the semivariogram method (Armstrong, 1986; Huang and Bradford, 1992; Eltz and Norton, 1997; Vivas Miranda, 2000; Vivas Miranda and Paz González, 2002), spectral analysis (Burg, 1967), and the several existing versions of the root mean square or roughness length method (Malinverno, 1990; Gallart et al., 1994; Vivas Miranda, 2000; Vivas Miranda and Paz González, 2002).

Variational techniques are considered to provide a better description of SSR (Vidal Vázquez et al., 2006, 2007). The ones most commonly used to estimate the fractal indices of soil profiles or surfaces are semivariance and local root mean square. Both of these methods are based on the calculation of the Hurst exponent, H , from which the fractal dimension, D , is assessed; moreover, variational methods involve an additional parameter, the so-called crossover length, l . The fractal dimension, D , is a descriptor of horizontal variations in soil roughness, whereas crossover length, l , is related to vertical differences in point elevation data (Vidal Vázquez et al., 2006).

In addition, multifractal models have been used to analyze the scale-invariant properties of objects in very different domains, from turbulent flows to financial data. Scale invariance has been found to be of increasing importance in understanding the complexity of natural phenomena. Multifractal analysis (MFA) has been used intensively in geomorphometry or digital terrain heights (digital elevation models) (Pike, 2000), but only recently to study agricultural soils. Manninen (2003) showed that bare soil exhibits multiscale behavior and Roisin (2007) that MFA can effectively analyze the variability in the inner heterogeneity of tilled soils from soil strength measurements.

To analyze soil surface roughness and related systems, the concepts of scale-invariance and multifractality provide to most productive framework for data analysis, one of such methods, it is called Structure Function, and it focuses on the absolute values of the differences that occur in the data over arbitrarily large or small scales.

To this end, several soil types and tillage tools were selected to study heterogeneity based on soil height readings and the application of multifractal concepts for characterizing soil microrelief (García Moreno, 2006; García Moreno et al., 2008a, 2008b, 2010). Based on Multiscale Analysis, the present study aimed to apply Structure Function analyses and gray differences distribution to original and absolute differences distribution of SSR data. To remark the differences of soil surface roughness the authors applied absolute average of the differences around each point, similar to the low pass filter to the image, called soil drop roughness (SDR). The Structure Function, and associated parameters, was then applied to extract generalised Hurst exponent depending on soil types and tillage tool used.

2. Materials and methods

2.1 Experimental sites

The field experiments were conducted on different soil types at three sites in semiarid central Spain. The first experimental plot was located in the province of Madrid, in fields

belonging to the Polytechnic University of Madrid's School of Agricultural Engineering (the Madrid site). The other two were located at La Higuera (Santa Olalla, province of Toledo), in the Spanish National Research Council's Experimental Station for Environmental Science (La Higuera site). The main soil characteristics, tested according to ISRIC/FAO (Merrill, 1995) and Soil Science Society of America (Sparks, 1996) methodologies are given in Table 1.

| Site | Conductivity (dS/m) | Organic matter (%) | pH | USDA textural analysis (%) | | | USDA textural class |
|------------|---------------------|--------------------|--------------|----------------------------|-----------|-----------|---------------------|
| | | | | Sand | Silt | Clay | |
| Madrid | 1.90 (0.34) | 1.8 (0.4) | 7.8 (0.2) | 57 (1) | 17 (2) | 26 (1) | Sandy clay loam |
| La Higuera | 0.21 (0.05) | 2.6 (0.1) | 6.2 (0.2) | 53 (2) | 23 (3) | 24 (1) | Sandy clay loam |
| La Higuera | 0.68 (0.55) | 1.5 (0.2) | 5.7 (0.1) | 63 (2) | 19 (2) | 18 (1) | Sandy loam |

Table 1. Properties of the soils studied. (The values in parenthesis are the standard deviation of 12 samples for each type, three per subplot.)

The three types of tools used to till each soil type, namely chisel, tiller, and roller, are the three most common in the central regions of Spain. All measurements were taken immediately after tillage to preclude the effects of other factors. In other words, SSR was analyzed in a total of nine scenarios. Tillage was performed using John Deere equipment: a Model 2810 moldboard plow, a Model 610 integral chisel plow, and a roller level.

The field data were gathered in 2005, one of the driest seasons in Spain in the last 100 yr, with no rainfall recorded in either the spring or the summer. Indeed, while the average annual rainfall in the area is 411 mm, only 125 mm fell in the experimental region between 1 Sept. 2004 and 31 Aug. 2005 (Instituto Nacional de Meteorología, 2005).

2.2 Soil surface roughness data

Field measurements were obtained with a full-scale pin meter shown in figure 1.



Fig. 1. Pin-meter used to measure soil surface roughness

This instrument consisted of a row of 35-cm-high pins, placed in a frame in which they could slide up or down to conform to surface irregularities. The pin heads were marked with a blue band to better visualize their respective positions when in contact with the soil. The frame, 85 cm high in all, was designed to be able to move the instrument across the soil without disturbing the pin pattern. The instrument was made of lightweight aluminium for ease of handling. With rows containing 50 pins spaced at 20-mm intervals, one full meter could be measured along the x axis with each reading. The y axis readings were taken by sliding the instrument across the plot, on tracks, stopping at 20-mm intervals. As the cells on the resulting grid measured 20 by 20 mm, a total of 2500 readings were taken per 1.0 m² of area. An earlier study (García Moreno, 2006) showed this spacing to be sufficient to measure the surface roughness of the three types of soil.

Each corner of the instrument was marked with a red dot and Visual Basic software was developed that would detect these marks as the vertical and horizontal references for shifts in row position.

A Kodak DC 4800 digital camera, set on a tripod, was used to capture pin positions. The lens was focused on a point at the center of the pin meter, i.e., at the average height of the red marks, to ensure the image would not be distorted. After comparing several models, a Silk tripod was found to be best suited to the 40-cm camera height required. The 3.1-megapixel camera was fitted with a 3× (28–84) optical zoom lens.

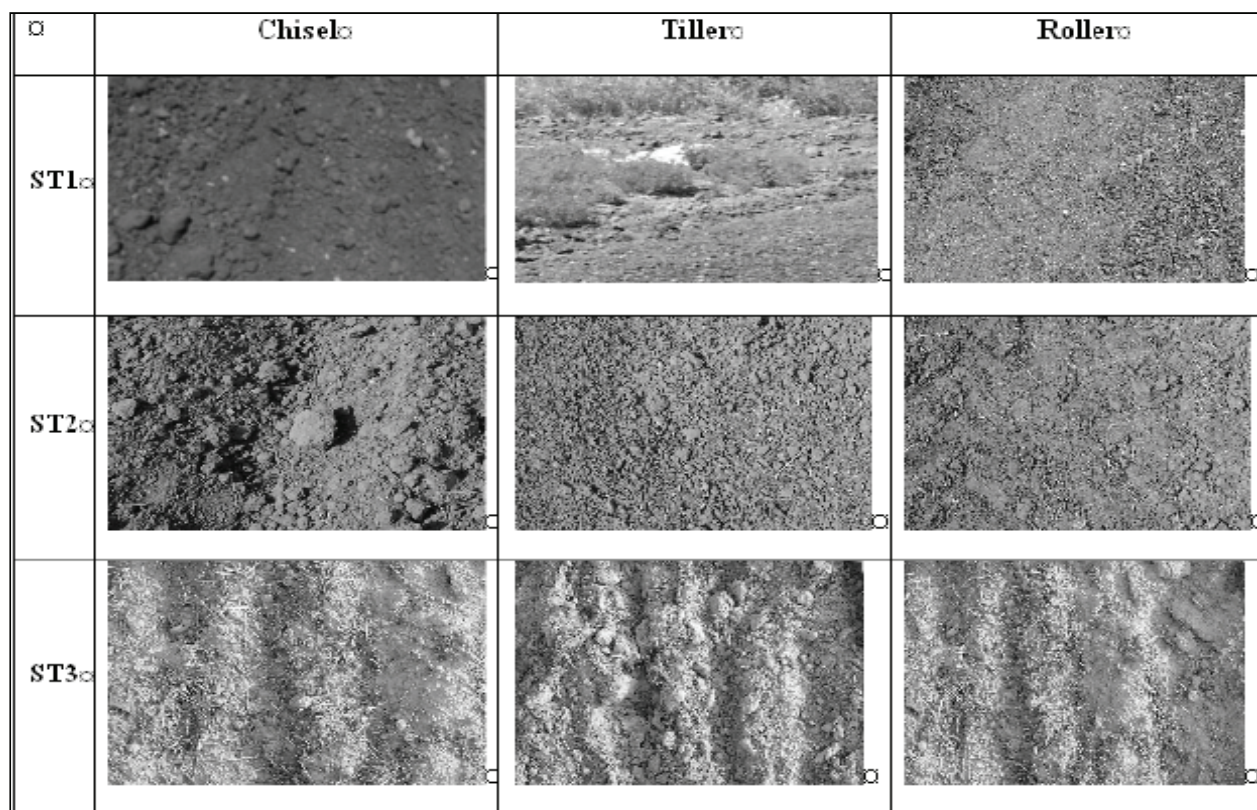


Fig. 2. Images of the plots after passing Chisel (left), Tiller (centre) and Roller (right) of the experimental fields at: ST1, E.T.S.I.A Technical University of Madrid with a Sandy Clay Loam soil; ST2, La Higuera (C.S.I.C.) with a Sandy Clay Loam; ST3, La Higuera (C.S.I.C.) with a Sandy Loam soil

Four sampling subplots of 1.0-m² were randomly chosen across a tilled area measuring 5 by 10 m². These four subplots served to evaluate the effects of each soil type and tillage tool. The data obtained were statistically analyzed to compare the effects of the different tools and soil types studied.

The field procedure consisted in placing the pin meter on the surface of a 1.0-m² patch of soil and capturing the initial pin positions and the positions after each 20-mm shift along the y axis. The camera was initially placed at a distance of 2 m from the pin meter. The x axis measurements were the positions of the row of 50 pins. The instrument was moved along the y axis over two rails perforated at 20-mm intervals. It was fitted with a hand brake to halt the process when soil was suspected to be on a light grade.

Consequently, the area measured was 2 by 2 m², with a resolution of 20 by 20 mm². A total of 10,000 elevation readings were taken on each field surface, sufficient to estimate SSR indices based on Multiscale Analysis (Merel and Farres, 1998; Tarquis et al., 2003) and shadow analysis interpretation (Garcia, 2006). Photographs of the nine scenarios studied, after tillage, are shown in figure 2.

2.3 Soil surface roughness data

The original soil surface data was compared to the data submitted to absolute differences distribution to better evaluate the behaviour of SSR related to soil type and tillage tool. After comparing the results, the modified data seems to better define the effects of the resulting soil surface roughness after passing the tillage tools to the different soils, and give a clearer image of the influence of soil type. For that reason after applying a gray scale distribution and Multifractal Analysis to both types of data, only the modified was evaluate using the Structure function. The resulting modified data was named by authors Soil Drop Roughness (SDR), since represent the highest differences on soil surface roughness values.

The gray scale distribution was applied giving a value of gray intensity (0 to 250 intensities) to the heights related to the soil surface roughness.

2.4 Multiscale analysis through structure function

Standard Gaussian-type statistics are not really adequate to describe Soil Surface Roughness. Means and standard deviations depend on the scale of space sampling. For such systems, the concepts of scale-invariance and multifractality provide to most productive framework for data analysis. One method for doing this is called "Structure Functions" focuses on the absolute values of the differences that occur in the data over arbitrarily large or small scales. For nonstationary processes $x(t)$, with stationary increments, the Structure Function of order q is defined as the q -th moment of the increments of $x(t)$ by the following equation:

$$S_i(q, s) = \left\langle |x_i(t+s) - x_i(t)|^q \right\rangle \quad (1)$$

Where i value represents the i th data point, and $\langle \rangle$ denotes the average.

Structure Functions are generalized correlation functions, which are particularly evident from equation 1 for the case where $q=2$. This second order is equivalent to the power spectrum. In general, q may be any real number not just integers, and can even be negative. However, there are divergence problems inherent to the negative-order exponent so that computations are best restricted to positive real number (Davis, 1994). If the process $x(t)$ is

scale-invariant and self similar or self-affine over some range of time lags $s_{\min} \leq s \leq s_{\max}$, then the q th-order structure function is expected to scale as:

$$S_i(q, s) \approx s^{\zeta(q)} \quad (2)$$

$\zeta(q)$, scaling exponent is monotonically non-decreasing function of q . The behaviour described by equations 1 and 2 is called "multiscaling" because each statistical moment is scaling but with a different exponent. Therefore, a hierarchy of exponents can be defined using $\zeta(q)$ for obtain the generalized Hurst exponent $H(q)$ introduced by Marshak et al. (1994)

$$H(q) = \frac{\zeta(q)}{q} \quad (3)$$

The first moment, characterizing the scaling of the average absolute fluctuations, corresponds to the scaling exponent $H = \zeta(q = 1)$. H characterizes the difference from the conserved pure multiplicative process; it is the degree of non conservation of the process (scale by scale), a quantifier of nonstationarity in the observed variability (Marshak et al 1994). The second moment, $H(q=2)$ is the Hurst exponent (HI). Processes with a linear $\zeta(q)$ are monofractal, $H(q)$ is constant. For multifractal process, this exponent is non-linear and concave. We can obtain an estimator of $\zeta(q)$ by log-log plot the slope for different q values. We use $\zeta(q)$ for $q=2, 3$ and 6 for obtain two parameters. The first one reflects the deviation from a linear structure function as:

$$\lambda_{desv} = 3\zeta(q = 1) - \zeta(q = 3) \quad (4)$$

Where λ_{desv} higher we move away from the monofractality. For that is a multifractality measure.

We define the second parameter, a measure of the intermittency when the scaling is in space (Mahrt, 1989) as

$$\mu_{int} = 2 - \zeta(q = 6). \quad (5)$$

3. Results and discussion

3.1 Gray scale interpretation

The original soil surface roughness resulting from each tillage tool for the different types of soils was represented as gray scale distribution, figure 3. Since the results were not very significant, the original data was submitted to the absolute differences distribution and again represented as gray image interpretation, figure 4, index called SDR.

The results obtained when the gray scale interpretation is applied to the SSR and SDR data are proportional, for original and modified data, to each the treatment, tillage-tool. The images resulting for each soil and treatment for the original an absolute differences data is quiet similar. The SDR data eliminates the interferences found from original data and express the fingerprint of the resulting SSR for each type of soil and tillage tool, for that reason the differences in gray tones are more extreme. The resulting images for the original data present more contrast and tonalities or gray.

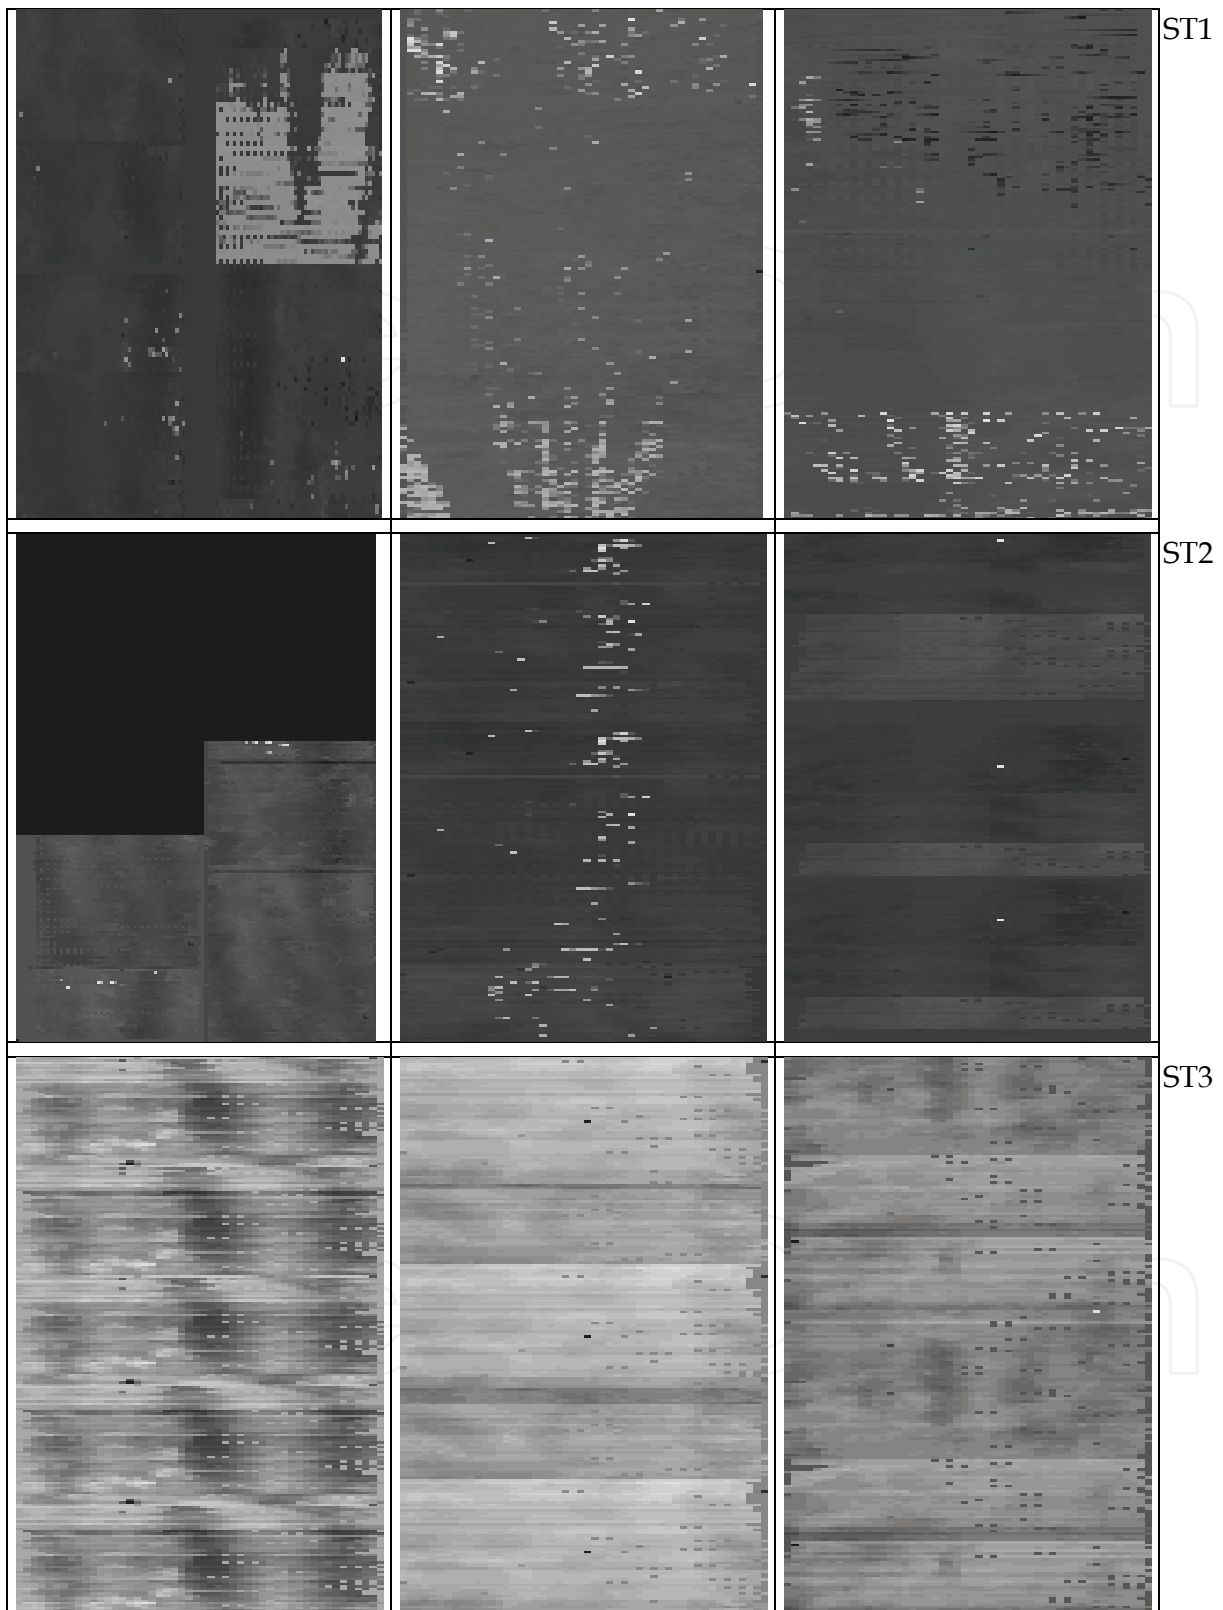


Fig. 3. Gray scale interpretation of soil surface roughness (SSR) distribution after applying chisel, roller and tiller (left to right) from E.T.S.I.A-U.P.M. Soil (ST1), Sandy Clay Loam soil at La Higuera (ST2) and Sandy Loam soil at La Higuera (ST3) after passing chisel, tiller and roller (left to right)

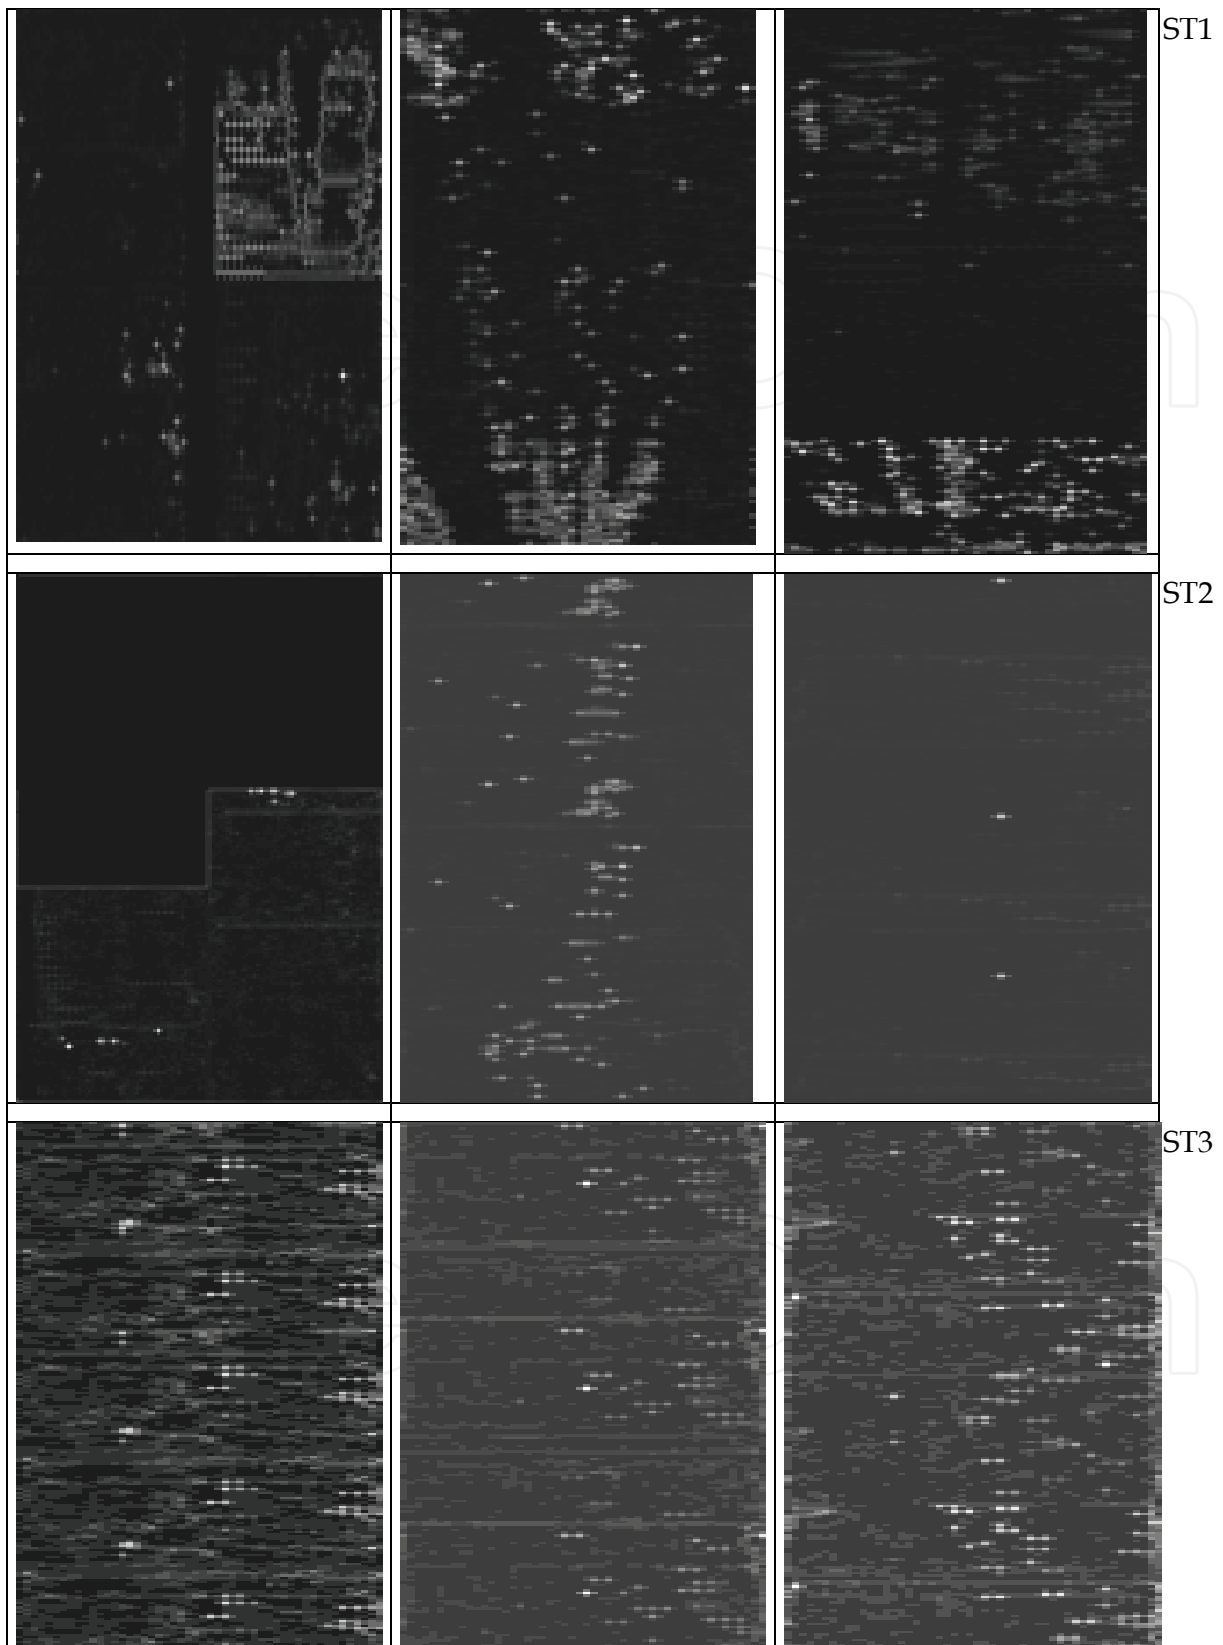


Fig. 4. Gray scale interpretation of soil surface roughness absolute differences distribution at E.T.S.I.A-U.P.M. (ST1), Sandy Clay Loam soil at La Higuera (ST2) and Sandy Loam soil at La Higuera (ST3) after applying chisel, tiller and roller (left to right)

The results obtained are consistent with the photographs in figure 2. In general, the images for the distribution for absolute differences data represent more exactly the expecting results for the conditions applied for each soil.

Differences amongst treatment reveal that we find more extreme differences in height for chisel followed by tiller and roller, also the soil of ETSIA, the soil type prevailing at the Madrid site, gives more extreme results than the soils from La Higuera. These fields, characterized by a high incidence of clods and fragmented stones, have been tilled conventionally for many years. The pedogenic influence is greater in the more highly developed La Higuera site soils, where conservation tillage has been in place for the last 20 yr.

An exception to this rule arose in the sandy clay loam at La Higuera, where the soil was so dry that chisel was nearly ineffectual. For that reason the results from the sandy loam soil shows more differences on SSR AND SDR data.

From the gray interpretation values the results from the ETSIA and sandy Clay Loam are the most extreme values (figure 3), corroborate with the absolute differences images (figure 4). However the results from the sandy loam of La Higuera gives less drastic differences but more continuous microelevations. These differences on the gray scaling, mainly based on SDR index, show that in the case of the ETSIA and the sandy clay loam the SSR is originated by tillage tool, while in the case of the sandy loam is due to the SSR of the soil itself.

3.2 Multiscale analysis through structure function

The results obtained from the $\zeta(q)$ curves, as can be observed in figure 5, corroborate the former results (Garcia Moreno et al., 2008a, 2008b), previously published on these data on multifractal nature of soil surface roughness analysed through spectrum evaluation. The soil drop roughness (SDR) results give greater variability for the ETSIA, followed by the sandy clay loam and the sandy loam of La Higuera. In this sense, the tiller gives the greater variability based on the tillage tool comparison followed by chisel and roller for all the cases except for the sandy clay loam. The main difference with the spectrum results is that SDR is greater for the tiller, in the case of SSR the variability is greater for chisel because of the geometry of the resulting roughness based on the tool. In both cases, the soil type does not influence the resulting geometry of the fingerprint.

The data resulting from both soils of La Higuera for figure 5 are similar, comparing to the Madrid site SDR results, where we observe differences.

The multifractality index, table 2, resulting from the different soil-tillage tool treatments gives a complementary information of the rest of parameters expressed in tables 2, 3, 4 and 5.

In general, observing the tendency of the $\zeta(q)$ curves the differences found in the HI and H are the smallest (tables 2 and 3 respectively). Lower q means decreasing differences, as it is shown in figure 5.

On the hand, multifractal index, λ , and intermittency, μ , require $\zeta(q)$ values for q equal 3 and 6 respectively, and therefore the variation is the higher than HI and H, (tables 4 and 5).

The resulting multifractal parameters seem to evaluate that the soil drop roughness resulting from the different treatments have different origin from soil and tillage tool casuistic. In this sense, and according to the gray scaling interpretation the soil drop roughness from the Madrid site seems to be originated more by tillage tool, while the cases from La Higuera seem that the soil drop roughness are due to the microelevation in the land itself. The variability of the SDR based on the $\zeta(q)$ of the sandy clay loam of La Higuera seems to be intermediate that means that the soil drop roughness is due in part to the tillage tool and in part to the land. In this case it is normal since as mentioned the soil was too dried to pass the chisel and the tiller in the sandy clay loam soil.

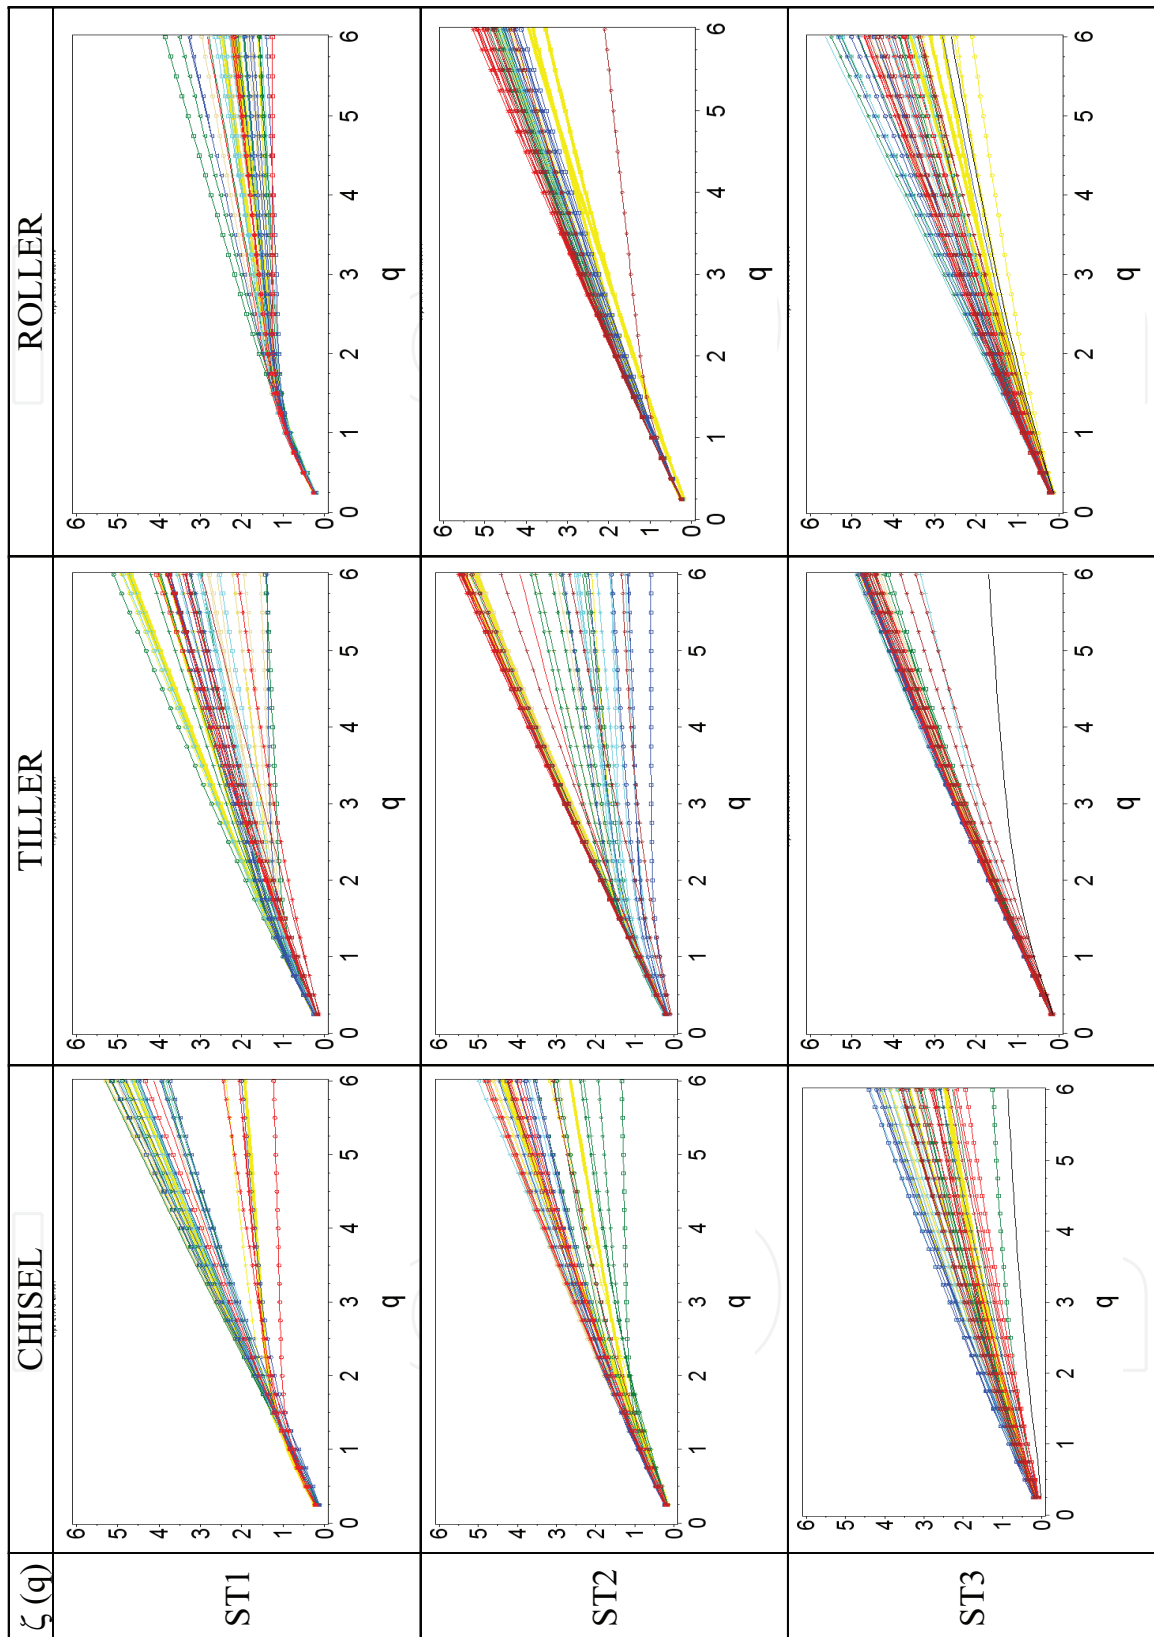


Fig. 5. $\zeta(q)$ curves obtained by SF for SSR related to soil type and tillage tool at E.T.S.I.A-U.P.M. (ST1), Sandy Clay Loam soil at La Higuera (ST2) and Sandy Loam soil at La Higuera (ST3) after applying chisel, tiller and roller

| Soil | TILLAGE TOOL | HI _{min} | HI _{max} | HI _{av} | HI _{std} | HI _k | HI _s |
|------|--------------|-------------------|-------------------|------------------|-------------------|-----------------|-----------------|
| ST1 | CHISEL | 0.12 | 0.86 | 0.60 | 0.11 | 4.85 | -1.67 |
| | TILLER | 0.36 | 0.99 | 0.74 | 0.18 | -1.08 | -0.45 |
| | ROLLER | 0.55 | 0.90 | 0.70 | 0.08 | -0.44 | 0.22 |
| ST2 | CHISEL | 0.36 | 0.85 | 0.62 | 0.11 | -0.09 | -0.37 |
| | TILLER | 0.19 | 0.84 | 0.56 | 0.14 | 0.16 | -0.32 |
| | ROLLER | 0.10 | 0.85 | 0.58 | 0.18 | -0.20 | -0.71 |
| ST3 | CHISEL | 0.12 | 0.74 | 0.40 | 0.15 | -0.81 | 0.07 |
| | TILLER | 0.16 | 0.66 | 0.44 | 0.11 | 0.06 | -0.48 |
| | ROLLER | 0.27 | 0.79 | 0.61 | 0.11 | 0.10 | -0.81 |

Table 2. Hurst Index (HI) derived from Multiscale analysis (MA) of soil drop roughness for three tillage treatments and the following soils: ST1, sandy clay loam at Madrid; ST2, sandy clay loam at La Higuera; ST3, sandy loam at La Higuera. Parameters of the HI distribution are: minimum value (HI_{min}), maximum value (HI_{max}), average (HI_{av}), standard deviation (HI_{std}), kurtosis (HI_k) and skewness (HI_s)

| Soil | Tillage Tool | H _{min} | H _{max} | H _{av} | H _{std} | H _k | H _s |
|------|--------------|------------------|------------------|-----------------|------------------|----------------|----------------|
| ST1 | CHISEL | 0.11 | 0.94 | 0.72 | 0.14 | 3.96 | -1.71 |
| | TILLER | 0.42 | 1.02 | 0.83 | 0.16 | 0.21 | -0.98 |
| | ROLLER | 0.78 | 0.97 | 0.87 | 0.04 | -0.39 | 0.44 |
| ST2 | CHISEL | 0.46 | 0.92 | 0.72 | 0.09 | 0.20 | -0.09 |
| | TILLER | 0.25 | 0.97 | 0.68 | 0.16 | -0.16 | -0.51 |
| | ROLLER | 0.27 | 0.91 | 0.67 | 0.18 | -0.64 | -0.66 |
| ST3 | CHISEL | 0.14 | 0.80 | 0.45 | 0.17 | -0.76 | 0.03 |
| | TILLER | 0.21 | 0.78 | 0.50 | 0.13 | -0.32 | 0.10 |
| | ROLLER | 0.38 | 0.85 | 0.69 | 0.11 | -0.04 | -0.75 |

Table 3. Value of H derived from Multiscale Analysis (MA) of soil drop roughness for three tillage treatments and the following soils: ST1, sandy clay loam at Madrid; ST2, sandy clay loam at La Higuera; ST3, sandy loam at La Higuera. Parameters of the H distribution are: minimum value (H_{min}), maximum value (H_{max}), average (H_{av}), standard deviation (H_{std}), kurtosis (H_k) and skewness (H_s)

| Soil | TILLAGE TOOL | λ_{\min} | λ_{\max} | λ_{av} | λ_{std} | λ_k | λ_s |
|------|--------------|------------------|------------------|-----------------------|------------------------|-------------|-------------|
| ST1 | CHISEL | -0.26 | 1.49 | 0.66 | 0.39 | -0.77 | -0.18 |
| | TILLER | 0.11 | 1.30 | 0.52 | 0.30 | 0.09 | 0.90 |
| | ROLLER | 0.17 | 1.37 | 0.89 | 0.25 | 0.31 | -0.38 |
| ST2 | CHISEL | -0.11 | 1.78 | 0.59 | 0.44 | 0.28 | 1.11 |
| | TILLER | 0.07 | 1.54 | 0.69 | 0.38 | -0.89 | 0.20 |
| | ROLLER | 0.10 | 1.51 | 0.50 | 0.31 | 2.21 | 1.32 |
| ST3 | CHISEL | -0.06 | 0.73 | 0.26 | 0.19 | -0.34 | 0.42 |
| | TILLER | -0.09 | 1.40 | 0.36 | 0.29 | 2.65 | 1.41 |
| | ROLLER | 0.08 | 0.94 | 0.46 | 0.25 | -0.90 | 0.38 |

Table 4. Multifractality index (λ) derived from Multiscale analysis (MA) of soil drop roughness for three tillage treatments and the following soils: ST1, sandy clay loam at Madrid; ST2, sandy clay loam at La Higuieruela; ST3, sandy loam at La Higuieruela. Parameters of the λ distribution are: minimum value (λ_{\min}), maximum value (λ_{\max}), average (λ_{av}), standard deviation (λ_{std}), kurtosis (λ_k) and skewness (λ_s)

| Soil | TILLAGE TOOL | μ_{\min} | μ_{\max} | μ_{av} | μ_{std} | μ_k | μ_s |
|------|--------------|--------------|--------------|-------------------|--------------------|---------|---------|
| ST1 | CHISEL | -2.07 | 2.71 | -0.15 | 0.91 | 0.42 | 0.50 |
| | TILLER | -3.46 | 1.43 | -1.25 | 1.39 | -1.20 | 0.30 |
| | ROLLER | -2.75 | 1.13 | -0.51 | 0.85 | -0.16 | -0.26 |
| ST2 | CHISEL | -2.69 | 2.56 | -0.29 | 1.11 | 0.06 | 0.49 |
| | TILLER | -2.64 | 2.95 | 0.13 | 1.12 | 0.31 | -0.05 |
| | ROLLER | -2.19 | 3.63 | -0.35 | 1.17 | 1.47 | 1.01 |
| ST3 | CHISEL | -1.70 | 2.11 | 0.31 | 0.92 | -0.62 | -0.06 |
| | TILLER | -1.22 | 2.30 | 0.27 | 0.82 | 0.04 | 0.49 |
| | ROLLER | -2.07 | 1.82 | -0.45 | 0.93 | -0.07 | 0.36 |

Table 5. Intermittency index (μ) derived from Multiscale analysis (MA) of soil drop roughness for three tillage treatments and the following soils: ST1, sandy clay loam at Madrid; ST2, sandy clay loam at La Higuieruela; ST3, sandy loam at La Higuieruela. Parameters of the μ distribution are: minimum value (μ_{\min}), maximum value (μ_{\max}), average (μ_{av}), standard deviation (μ_{std}), kurtosis (μ_k) and skewness (μ_s)

4. Conclusions

Multiscaling analyses of soil surface roughness data are useful descriptors of soil drop roughness structure and complexity. Also these results were valuable supplements to image interpretations of gray scales for microrrelief distribution.

As regards variations due to soil type, in roller and tiller tillage, the images interpretation of gray scales were substantially extreme than for roller tool, whereas in chisel tillage, the resulting images exhibited the greatest variation. The latter finding is an indication of the scant complexity of the structure generated by the tool in the case of the Madrid site soil. However, the method shows that for the soils of La Higuera the differences of the microrrelief are due to the soil itself more than the tillage tools. Since extremely dry soil may affect the results in such regions, however, field problems must be taken into account when interpreting the resulting soil drop roughness data.

Structure Function is highly sensitive to roughness of soil height measurements. It appears to be better suited than conventional indexes to comparing differently managed plots. The methodology highlights the steepest roughness that means the border values amongst the smoothest surface.

Structure Function of the absolute differences of the soil drop roughness of the sandy loam at La Higuera are less multifractal, that means that the results of SDR are due mainly to the soil, and have less influence by tillage tools. While the case of the Madrid site is the opposite and the multifractality of results are originated mainly by the different tillage tool. The values obtained with different tillage tools are higher in clayey soils, where the presence of clods and rock fragments adds to heterogeneity, raising the associated indexes, case of Madrid site. In the studied cases the tiller results in greatest variations in all the three soil types, whereas the other tillage tools are more homogeneous.

The Structure Function seems to be a good tool to explain the variability and origin of the soil drop roughness depending on the tillage tool and soil type, mainly in extreme cases. Even this methodology is coming from the turbulence field analyses, where the amount of data is much higher than those who have in this project, the concept of generalised Hurst exponent improves to differentiate dissimilar cases.

5. Acknowledgment

The authors wish to thank Dr. Carlos Lacasta, director of the Spanish National Research Council's Experimental Centre for Environmental Science at La Higuera Santa Olalla, Toledo, and his team, for their assistance in the field experiments. This study was possible by the economic support of Conselleria de Economía e Industria, Xunta de Galicia, through the Angeles Alvariño Program and the INCITE Human Resources Program (Cofinanced by the European Social Fund).

6. References

- Agterberg, F.P., Cheng, Q., Brown, A., Good, D., 1996. Multifractal modelling of fractures in Lac Du Bonnet batholith, Manitoba. *Computers & Geosciences*, 22(5), 497-507.
- Ahammer, H. and DeVaney, T.T.J.. 2005. The influence of noise on the generalized dimensions. *Chaos, Solutions and Fractals*, 26(3), 707-717.

- Allain, C., and M. Cloitre. 1991. Characterizing the lacunarity of random and deterministic fractal sets. *Physical Review A*, 44, 3552-3558.
- Allmaras, R.R., R.E Burwell., W.E Larson, and R.F. Holt. 1966. Total porosity and random roughness of the inter row zone as influenced by tillage. *USDA Conserv. Res. Rep.* 7, 1-22.
- Armstrong, A.C., 1986. On the fractal dimensions of some transient soil properties. *J. Soil Sci.*, 37, 641-652.
- Bertuzzi, P., G. Raws, G., and D. Couralt, D.,. 1990. Testing Roughness indices to estimate soil surface changes du to simulated rainfall. *Soil and Tillage Research* 17:87-99.
- Bird, N., M.C. Díaz, A. Saa and AM Tarquis, 2006. A Review of Fractal and Multifractal Analysis Of Soil Pore-Scale Images. *J. of Hydrology*, 322, 211-219.
- Buczowski, S.; Hildgen, P., Cartilier, L., 1998. Measurements of fractal dimension by box-counting: a critical analysis of data scatter. *Physica A*, 252, 23-24.
- Burg, J., 1967. Maximum entropy spectral analysis. In: *Proceedings of the 37th Meeting Society of Exploration Geophysicist*, Oklahoma City.
- Burrough, P.A. 1983. Multiscale source of spatial variation in soil: I. The application of fractal concepts to nested levels of soil variation. *J. Soil Sci.* 34:577-597
- Cheng, Q. and F.P. Agterberg, 1996. Multifractal modelling and spatial statistics. *Mathematical Geology*, 28(1), 1-16.
- Cheng, Q., 1997a. Discrete multifractals. *Mathematical Geology*, 29(2), 245-266.
- Cheng, Q., 1997b. Multifractal modeling and lacunarity analysis. *Mathematical Geology*, 29(7), 919-932.
- Cheng, Q., 1999. The gliding box method for multifractal modeling. *Computer&Geoscience*, 25, 1073-1079.
- Currence, H.D., Lovely, W.G., 1970. The analysis of soil surface roughness. *Trans. of the ASAE* 13, 710-714.
- Davis, A., Marshak, A., Wiscombe, W. and Cahalan, R. 1994. Multifractal Characterisations of Simulated. *J. Geophysics Research*, 99, 8055-8072.
- Eltz, F.L.F., Norton, L.D., 1997. Surface roughness changes as affected by rainfall erosivity, tillage and canopy cover. *Soil Sci. Soc. Am. J.* 61: 1746-1755.
- Evertsz, C. J. G., Mandelbrot, B.B., 1992. Multifractal Measures. In Peitgen, H., Juergens, H., Saupe, D. (Editors): *Chaos and Fractals*. Springer, Berlin, pp 921-953.
- Feder, J., 1989. *Fractals*, Plenum Press: New York.
- Gallant, J.C., Moore, I.D., Hutchinson, M.F., Gessler, P., 1994. Estimating fractal dimension of profiles: a comparison of methods. *Math. Geol.* 26, 455-481.
- Gallart, F., Pardini, G., 1996. Perfilru: un programa para el análisis de perfiles microtopograficos mediante el estudio de la geometría fractal. *Cuadernos Lab. Xeolóxico de Laxe*, 21, 169-178 (in spanish).
- Huang, C.-h. 1998. Quantification of soil microtopography and surface roughness. *Fractals in soil science*. Ed. By Philippe Baveye, Jean Yves Parlange and Bobby A. Stewart. Advances in Soil Science. CRC.
- García Moreno, R. (2006). Desarrollo de una metodología para la medición de la rugosidad del suelo. Ph. D. Dissertation, Polytechnic University of Madrid (UPM), pp. 120.
- García Moreno, R., Díaz Álvarez, M. C., Tarquis Alfonso, A., Barrington, S. and Saa Requejo, A. 2008a. Tillage and soil type effects on soil surface roughness at semiarid climatic conditions, *Soil and Tillage Research* 98 (1), 35-44.

- García Moreno, R., Saa Requejo, A., Tarquis, A.M., Barrington, S., and Díaz Álvarez, M.C., 2008b. A shadow analysis method to measure soil surface roughness. *Geoderma* 146 (2008) 201-208.
- García Moreno, R., Díaz Álvarez, M.C., Tarquis, A. M., Paz González, A., and Saa Requejo, A Shadow analysis of soil surface roughness compared to the chain set method and direct measurement of micro-relief, *Biogeosciences*, 7: 2477-2487, 2010.
- Grau, J, Médez, V.; Tarquis, A.M., Saa, A. and M.C. Díaz., 2006. Comparison of gliding box and box-counting methods in soil image analysis. *Geoderma*, 134, 349-359.
- Hagen, L. J. 1988. New wind erosion model developments in the USDA. In 1988 *Wind Erosion Conference Proceedings*. Texas Tech. University, Lubbock, 11-13 April.
- Huang, C.H. 1998. Quantification of soil microtopography and surface roughness. *Fractals in soil science*. Ed. By Philippe Baveye, Jean Yves Parlange and Bobby A. Stewart. Advances in Soil Science. CRC.
- Huang, C.H., Bradford, J.M., 1992. Applications of a laser scanner to quantify soil microtopography. *Soil Sci. Soc. Am. J.* 56:14-21.
- Instituto Nacional de Meteorología, 2005. Ministerio de Medio Ambiente. <http://www.inm.es/web/izq/noticias/meteonoti/>
- Kamphorst, E.C., Jetten, V, Guérif, J. Pitkänen, J. Iversen, B.V., Douglas, J.T., and A. Paz, A. 2000. Predicting depression storage from soil surface roughness. *Soil Sci, Soc. Am. J.* 64:1749-1758.
- Larney, F.J., M.S. Bullock, H.H. Janzen, B.H. Ellert, and E.C.S. Olson.1998. Wind erosion effects on nutrient redistribution and soil productivity. *J. Soil Water Conserv.* 53:133-140.
- Larney, F.J., M.S. Bullock, S.M. McGinn, and D., Black, A. L.,W. Fryrear, D. W., Saleh, A., Zobeck, T.M., Halvorson, A. D., Tanaka, D. L.,. 1995. Quantifying wind erosion on summer fallow in southern Alberta. *J. Soil Water Conserv.* 50:91-95.
- Linden, D.R., Van Doren, J.D.M., 1986. Parameters for characterizing tillage-induced soil surface roughness. *Soil Sci. Soc. Am J.* 50: 1550-1565.
- Lovejoy, S. D. Schertzer, 2007: Scaling and multifractal fields in the solid earth and topography, *Nonlin. Processes Geophys.*, 14 , 465-502.
- Mahrt, L. 1989. Intermittency of atmospheric turbulence. *Journal of the Atmospheric Sciences* 46, 79-95.
- Malinverno, A., 1990. A single method to estimate the fractal dimension of self-affine series. *Geophys. Res. Lett.* 17 (11), 1953.
- Manninen A. T., 2003. Multiscale surface roughness description for scattering modelling of bare soil. *Physica A*, Volume 319, 1 march 2003, pp. 535-551.
- Marshak A., Davis, R., Cahalan R and Wiscombe W. 1994. Bounded cascade models as nonstationary multifractals. *Physical Review E*. Vol 49, nº1, 55-69.
- Merel, A.P., Farres, P.J., 1998. The monitoring of soil surface development using analytical photogrammetry. *Photogrametric record.* 16(92): 331-345.
- Merrill, S., 1995. Procedures for soil analysis. ISRIC, FAO, Holanda.
- Murillo, J M., Moreno, E., Girón, I.F., and Oblitas, M. I., 2004. Conservation tillage: long term effect on soil and crops under rained conditions in south-west Spain (Western Andalusia). *Spanish Journal of Agricultural Research* (2004) 2 (1), 35-43.
- Pardini, G., Gallart, F.A., 1998. Combination of laser technology and fractals to analyze soil surface roughness. *European J. Of Soil Sci.* 49:197-202.

- Perfect, E., P.H. Groenevelt, B.D. Kay, and C.D. Grant. 1990. Spatial variability of soil penetrometer measurements at the mesoscopic scale. *Soil Tillage Res.* 16:257-271.
- Perfect, E., Kay, B.D., 1995. Applications of fractals in soil and tillage research: a review. *Soil Tillage Res.* 36, 1-20.
- Perrier, E., Tarquis, A.M. and Annette Dathe, 2006. A Program for Fractal and Multifractal Analysis of Two-Dimensional Binary Images . Computer Algorithms versus Mathematical Theory. *Geoderma*, 134, 284-294.
- Pike, R.J., 2000. Geomorphometry -diversity in quantitative surface analysis. *Physical Geography*, 24(1), 1-20.
- Podmore, T.H., and L.F. Huggins. 1981. An automated profile meter for surface roughness measurements. *Trans. ASAE* 24:663-665, 669.].
- Porta Casanellas, J., López-Acevedo Reguerín, M., Roquero de Laburu, C. 2003. *Edafología para la agricultura y el medio ambiente*. Ed. Mundi-Prensa
- Potter, K.N., T.M. Zobeck and L.J. Hagen. 1990. A microrrelief index to estimate soil erodibility by wind. *Trasns. ASAE* 33:151-155.
- Roisin, C.J.C., 2007. A multifractal approach for assessing the structural state of tilled soils. *Soil Sci. Soc. Am. J.* 71:15-25.
- Saxton, K.E. 1995. Wind erosion and its impact on off-site air quality in the Columbia plateau – An integrated research plan. *Trans. ASAE* 38:1031-1038.
- Schertzer, D. and Lovejoy, S., 1991. *Nonlinear Variability in Geophysics*. Kluwer Academic Publishers, Dordrecht, The Netherlands, 318 pp.
- Soil Science Society of America. 1996. *Methods of Soil Analysis. Part 3 - Chemical Methods*. SSSA Book Series:5. Ed. D.L. Sparks.
- Tarquis, A.M., Giménez, D., Saa, A., Diaz, M.C., Gascó, J.M. 2003. Scaling and multiscaling of soil pore systems determined by image analysis. In *Scaling methods in soil physics*, Pachepsky, Radcliffe and Selim, Eds., CRC Press, chap. 2.
- Vidal Vázquez, E., Vivas Miranda, J.G., Paz González, A., 2005. Characterizing anisotropy and heterogeneity of soil surface microtopography using fractal models. *Ecological Modelling*, 182, 337-353.
- Vidal Vázquez, E., Miranda, J.G.V., Alves, M.C. and A. Paz González, 2006. Effect of tillage on fractal indices describing soil surface microrelief of a Brazilian Alfisol. *Geoderma*, 134, 428-439.
- Vidal Vázquez, E., Miranda, J. G. V. and A. Paz González. 2007. Describing soil surface microrelief by crossover length and fractal dimension. *Nonlin. Processes Geophys.*, 14, 223-235.
- Vivas Miranda, J.G., 2000. Análisis fractal del microrrelieve del suelo (in spanish). Ph. D. Dissertation, University of Coruña, p. 313.
- Vivas Miranda, J.G., Paz González, A., 2002. Fractal models for the description of soil surface roughness. *Proceedings of the third International Congress Man and Soil at the Third Millennium*. J.L. Rubio, R.P.C. Morgan S. Asins and V. Andreu, eds. Geoforma Ediciones. 2099- 2112
- Zobeck, T.M. and Onstad, C.A., 1987. Tillage and rainfall effect on random roughness: A review. *Soil Tillage Res.* 9(1):1-20.



Principles, Application and Assessment in Soil Science

Edited by Dr. Burcu E. Ozkaraova Gungor

ISBN 978-953-307-740-6

Hard cover, 394 pages

Publisher InTech

Published online 22, December, 2011

Published in print edition December, 2011

Our dependence on soil, and our curiosity about it, is leading to the investigation of changes within soil processes. Furthermore, the diversity and dynamics of soil are enabling new discoveries and insights, which help us to understand the variations in soil processes. Consequently, this permits us to take the necessary measures for soil protection, thus promoting soil health. This book aims to provide an up-to-date account of the current state of knowledge in recent practices and assessments in soil science. Moreover, it presents a comprehensive evaluation of the effect of residue/waste application on soil properties and, further, on the mechanism of plant adaptation and plant growth. Interesting examples of simulation using various models dealing with carbon sequestration, ecosystem respiration, and soil landscape, etc. are demonstrated. The book also includes chapters on the analysis of areal data and geostatistics using different assessment methods. More recent developments in analytical techniques used to obtain answers to the various physical mechanisms, chemical, and biological processes in soil are also present.

How to reference

In order to correctly reference this scholarly work, feel free to copy and paste the following:

R. García Moreno, M.C. Díaz Álvarez, A. Saa Requejo and J.L. Valencia Delfa (2011). Multiscaling Analysis of Soil Drop Roughness, Principles, Application and Assessment in Soil Science, Dr. Burcu E. Ozkaraova Gungor (Ed.), ISBN: 978-953-307-740-6, InTech, Available from: <http://www.intechopen.com/books/principles-application-and-assessment-in-soil-science/multiscaling-analysis-of-soil-drop-roughness>

INTECH
open science | open minds

InTech Europe

University Campus STeP Ri
Slavka Krautzeka 83/A
51000 Rijeka, Croatia
Phone: +385 (51) 770 447
Fax: +385 (51) 686 166
www.intechopen.com

InTech China

Unit 405, Office Block, Hotel Equatorial Shanghai
No.65, Yan An Road (West), Shanghai, 200040, China
中国上海市延安西路65号上海国际贵都大饭店办公楼405单元
Phone: +86-21-62489820
Fax: +86-21-62489821

© 2011 The Author(s). Licensee IntechOpen. This is an open access article distributed under the terms of the [Creative Commons Attribution 3.0 License](#), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

IntechOpen

IntechOpen